


CONSTRUCTION NOTES FOR SILT FENCE

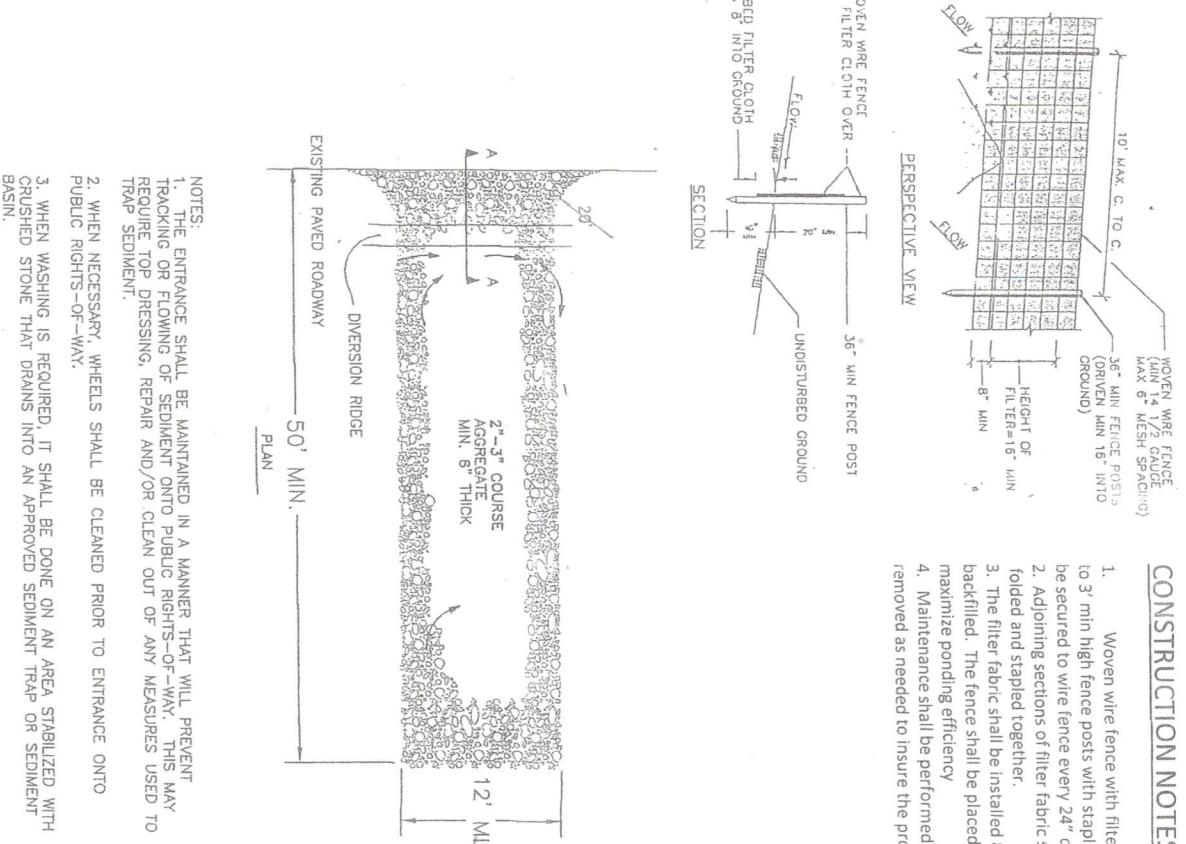

1. Woven wire fence with filter cloth to be fastened securely to 3' min high fence posts with staples or wire ties. Fabric should be secured to wire fence every 24" on top and mid section.
2. Adjoining sections of filter fabric shall be overlapped 6", folded and stapled together.
3. The filter fabric shall be installed 8" min into the trench and backfilled. The fence shall be placed on slope contours to maximize ponding efficiency.
4. Maintenance shall be performed and material shall be removed as needed to insure the proper performance of the silt fence system.

EROSION CONTROL STANDARD NOTES

EXCAVATION, FILLING, GRADING AND STRIPPING SHALL BE PERMITTED TO BE UNDERTAKEN ONLY IN SUCH LOCATIONS AND IN SUCH A MANNER AS TO MINIMIZE THE POTENTIAL OF EROSION AND SEDIMENT AND THE THREAT TO THE HEALTH, SAFETY AND WELFARE OF NEIGHBORING PROPERTY OWNERS AND THE GENERAL PUBLIC.

2. SITE PREPARATION AND CONSTRUCTION SHALL BE FITTED TO THE VEGETATION, TOPOGRAPHY AND OTHER NATURAL FEATURES OF THE SITE AND SHALL PRESERVE AS MANY OF THESE FEATURES AS FEASIBLE.

3. THE CONTROL OF EROSION AND SEDIMENT SHALL BE A CONTINUOUS PROCESS UNDERTAKEN AS NECESSARY PRIOR TO, DURING AND AFTER SITE PREPARATION AND CONSTRUCTION.

4. THE SMALLEST PRACTICAL AREA OF LAND SHALL BE EXPOSED BY SITE PREPARATION AT ANY GIVEN TIME.

5. THE EXPOSURE OF AREAS BY SITE PREPARATION SHALL BE KEPT TO THE SHORTEST PRACTICAL PERIOD OF TIME PRIOR TO THE CONSTRUCTION OF STRUCTURES OR IMPROVEMENTS OR THE RESTORATION OF THE EXPOSED AREAS TO AN ATTRACTIVE NATURAL CONDITION.

6. MULCHING OR TEMPORARY VEGETATION SUITABLE TO THE SITE SHALL BE USED WHERE NECESSARY TO PROTECT AREAS EXPOSED BY SITE PREPARATION, AND PERMANENT VEGETATION WHICH IS WELL ADAPTED TO THE SITE SHALL BE INSTALLED AS SOON AS PRACTICAL.

7. WHERE SLOPES ARE TO BE REVEGETATED IN AREAS EXPOSED BY SITE PREPARATION, THE SLOPES SHALL NOT BE OF SUCH STEEPNESS THAT VEGETATION CANNOT BE READILY ESTABLISHED OR THAT PROBLEMS OF EROSION OR SEDIMENT MAY RESULT.

8. SITE PREPARATION AND CONSTRUCTION SHALL NOT ADVERSELY AFFECT THE FREE FLOW OF WATER BY ENTRADING ON, BLOCKING OR RESTRICTING WATERCOURSES.

9. ALL FILL MATERIAL SHALL BE COMPOSITION SUITABLE FOR THE ULTIMATE USE OF THE FILL, FREE OF RUBBISH AND CAREFULLY RESTRICTED IN ITS CONTENT OF BRUSH, STUMPS, TREE DEBRIS, ROCKS, FROZEN MATERIAL AND SOFT OR EASILY COMPRESSIBLE MATERIAL.

10. FILL MATERIAL SHALL BE COMPAKTED SUFFICIENTLY TO PREVENT PROBLEMS OF EROSION AND WHERE THE MATERIAL IS TO SUPPORT STRUCTURES, IT SHALL BE COMPACTED TO A MINIMUM OF NINETY PERCENT (90%) OF STANDARD PROCTOR WITH PROPER MOISTURE CONTROL.

11. ALL TOPSOIL WHICH IS EXCAVATED FROM A SITE SHALL BE STOCKPILED AND USED FOR THE RESTORATION OF THE SITE, AND SUCH STOCKPILES, WHERE NECESSARY, SHALL BE SEEDED OR OTHERWISE



EROSION & SEDIMENT CONTROL PLAN THOMAS CORCORAN 1924 ROUTE 9W MILTON, NEW YORK TN OF MARLBORO 103.1-2-61	SCALE	AS SPECIFIED	LOUIS S. DUBOIS, P.E.	DATE	10/5/2017	
	DRAWN BY	LSD	116 VINEYARD AVENUE	REVISED		
	APPROVED	LSD	HIGHLAND, NEW YORK	DRAWING	DETAILS & NOTES	
			(845) 691-2247 OFFICE			
		(845) 691-6515 FAX				
		(845) 224-7102 CELL				
		louisdubois@optimum.net				