



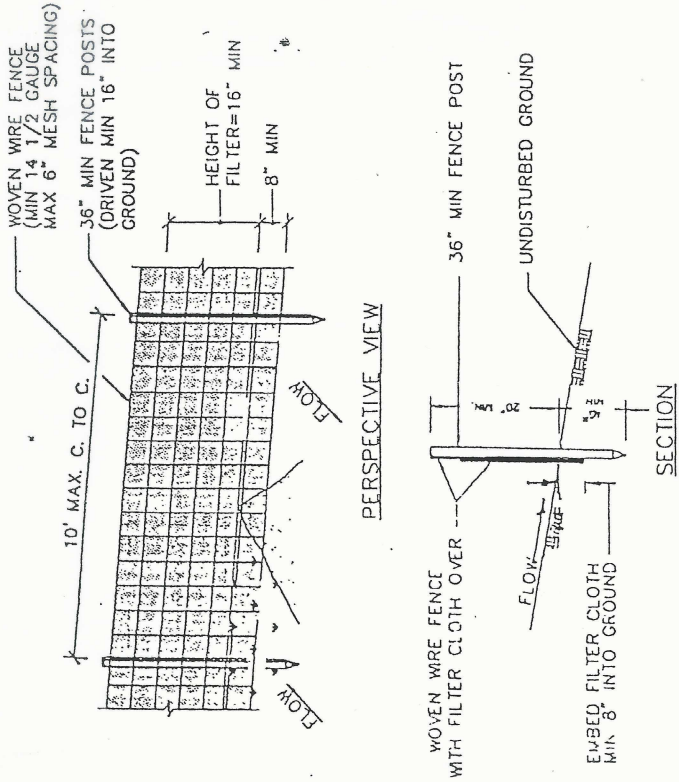

CONSTRUCTION NOTES FOR SILT FENCE

1. Woven wire fence with filter cloth to be fastened securely to 3' min high fence posts with staples or wire ties. Fabric should be secured to wire fence every 24" on top and mid section.
2. Adjoining sections of filter fabric shall be overlapped 6", folded and stapled together.
3. The filter fabric shall be installed 8" min into the trench and backfilled. The fence shall be placed on slope contours to maximize ponding efficiency
4. Maintenance shall be performed and material shall be removed as needed to insure the proper performance of the silt fence system.

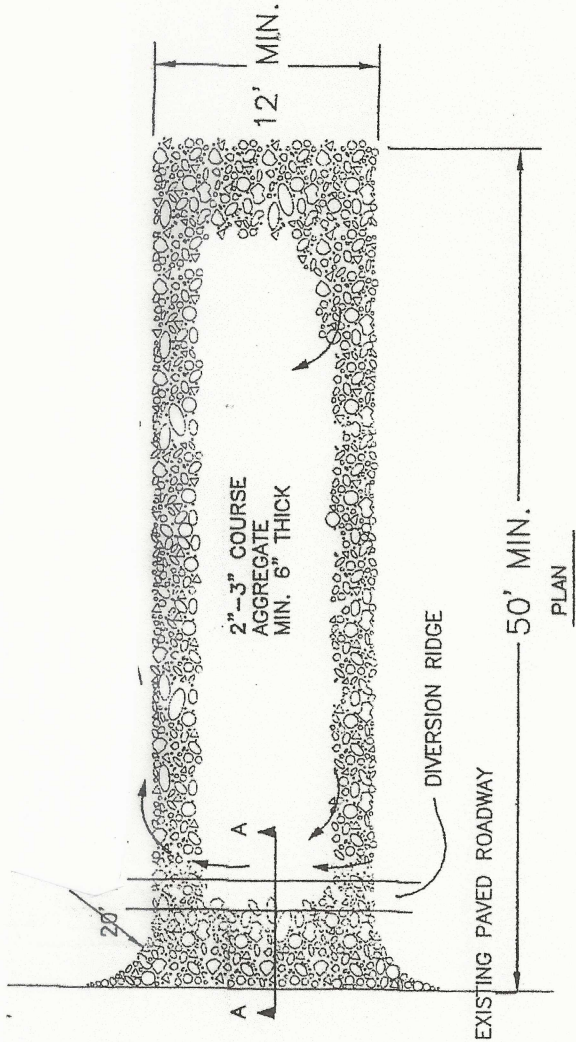

- NOTES:
1. THE ENTRANCE SHALL BE MAINTAINED IN A MANNER THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEAN OUT OF ANY MEASURES USED TO TRAP SEDIMENT.
 2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHTS-OF-WAY.
 3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN.

STABILIZED CONSTRUCTION ENTRANCE

NOT TO SCALE



EROSION & SEDIMENT CONTROL PLAN
THOMAS CORCORAN
1924 ROUTE 9W
MILTON, NEW YORK
TN OF MARLBORO 103.1-2-61

SCALE
AS SPECIFIED
DRAWN BY
LSD
APPROVED
LSD

LOUIS S. DUBOIS, P.E.
116 VINEYARD AVENUE
HIGHLAND, NEW YORK
(845) 691-2247 OFFICE
(845) 691-6515 FAX
(845) 224-7102 CELL
louisdubois@optimum.net

DATE 10/5/2017
REVISED 10/19/2017
DRAWING DETAILS & NOTES