


E-WP8 Series

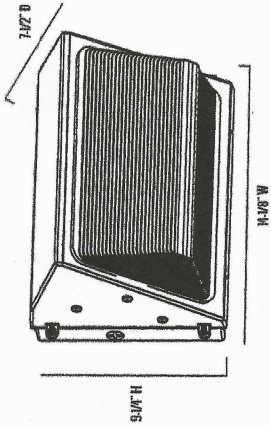

Series Overview

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
7 1/2\" D x 14 1/8\" W x 9 1/4\" H	8.6 lbs.	8 to 18 feet	2 to 3 times the mounting height

Fixture Specifications

HOUSING	Heavy duty, die-cast aluminum housing with hinged door frame		
LENS ASSEMBLY	Dark bronze polyester powder-coat finish		
MOUNTING	Heat and shock-resistant borosilicate glass prismatic lens		
	1/2\" NPT tapped knockouts for conduit entrances (one on top, one on each side, one on back)		

Electrical Performance

OPERATING MINIMUM	LIFESPAN	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated 75,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
Current Draw (amps)	0.41A	0.24A	0.21A	0.13A

Warranty & Certifications

WARRANTY	UL LISTED	DLC	ENERGY STAR
5-Year Limited	Wet Locations		

Output Specifications


SKU	LIGHT OUTPUT	COLOR TEMP (5000K)	POWER CONSUMPTION	COLOR ACCURACY	REPLACES
E-WP8L05GZ	3200 Lumens	Cool White (5000K)	47W	≥ 70 CRI	100W PSMH
E-WP8L05NZ	2900 Lumens	Neutral White (4000K)	47W	≥ 70 CRI	100W PSMH

Accessories



Photocell - Button, 120V/208V/240V/277V
SKU: E-ACP1 (020V)
E-ACP2 (208V/240V/277V)
USE: Photocell is field installed.
Drilling of the back box in the field is required.

Photometric Diagrams



Mounted at 10 ft.

All published photometric testing performed to ESNIA LM-79-08 standards by a NWAP certified laboratory. Fixture photometrics was completed on a single representative fixture.



SIGN & LIGHTING DETAILS
THOMAS CORCORAN
1924 ROUTE 9W
MILTON, NEW YORK
TN OF MARLBORO 103.1-2-61

SCALE	AS SPECIFIED
DRAWN BY	LSD
APPROVED	LSD

LOUIS S. DUBOIS, P.E.
116 VINEYARD AVENUE
HIGHLAND, NEW YORK
(845) 691-2247 OFFICE
(845) 691-6515 FAX
(845) 224-7102 CELL
louisdubois@optimum.net

DATE	10/5/2017
REVISED	10/19/2017
DRAWING	DETAIL SHEET