


[illegible]

SITE INVESTIGATION PERFORMED 3/16/20 and 5/15/20 DUE TO COVID-19 RESTRICTION, JOINT INSPECTION COULD NOT BE CONDUCTED

RESTRICTION, JOINT INSPECTION COULD NOT BE CONDUCTED

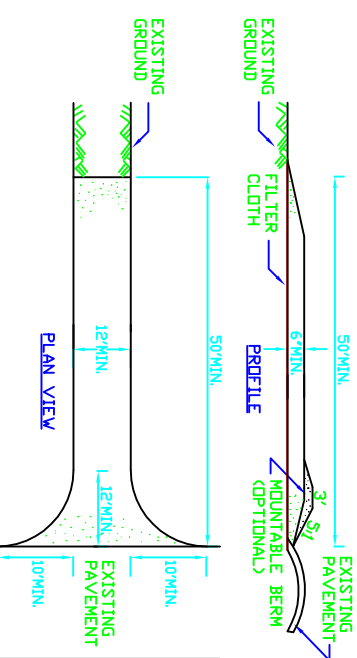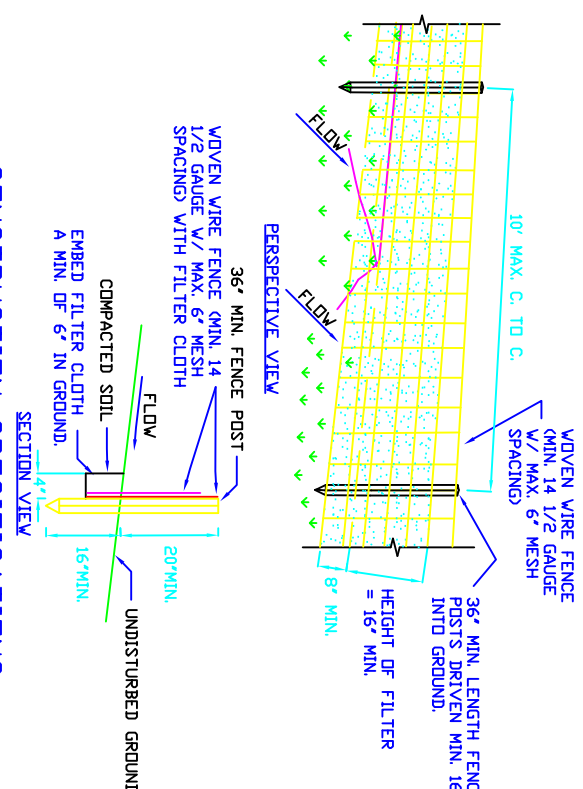

1. STONE SIZE - USE 2" PAVING, NOT RECYCLED OR RECYCLED EQUIVALENT
2. DRAINAGE - 1/2" PER FOOT, 1/4" PER FOOT MINIMUM
3. DRAINAGE - 1/2" PER FOOT, 1/4" PER FOOT MINIMUM IN A SINGLE REINFORCE LUT HOLE
4. THICKNESS - NOT LESS THAN SIX (6) INCHES.
5. JOINTS - 1/2" MINIMUM
6. JOINTS - 1/2" MINIMUM
7. JOINTS - 1/2" MINIMUM
8. JOINTS - 1/2" MINIMUM
9. JOINTS - 1/2" MINIMUM
10. JOINTS - 1/2" MINIMUM
11. JOINTS - 1/2" MINIMUM
12. JOINTS - 1/2" MINIMUM
13. JOINTS - 1/2" MINIMUM
14. JOINTS - 1/2" MINIMUM
15. JOINTS - 1/2" MINIMUM
16. JOINTS - 1/2" MINIMUM
17. JOINTS - 1/2" MINIMUM
18. JOINTS - 1/2" MINIMUM
19. JOINTS - 1/2" MINIMUM
20. JOINTS - 1/2" MINIMUM
21. JOINTS - 1/2" MINIMUM
22. JOINTS - 1/2" MINIMUM
23. JOINTS - 1/2" MINIMUM
24. JOINTS - 1/2" MINIMUM
25. JOINTS - 1/2" MINIMUM
26. JOINTS - 1/2" MINIMUM
27. JOINTS - 1/2" MINIMUM
28. JOINTS - 1/2" MINIMUM
29. JOINTS - 1/2" MINIMUM
30. JOINTS - 1/2" MINIMUM
31. JOINTS - 1/2" MINIMUM
32. JOINTS - 1/2" MINIMUM
33. JOINTS - 1/2" MINIMUM
34. JOINTS - 1/2" MINIMUM
35. JOINTS - 1/2" MINIMUM
36. JOINTS - 1/2" MINIMUM
37. JOINTS - 1/2" MINIMUM
38. JOINTS - 1/2" MINIMUM
39. JOINTS - 1/2" MINIMUM
40. JOINTS - 1/2" MINIMUM
41. JOINTS - 1/2" MINIMUM
42. JOINTS - 1/2" MINIMUM
43. JOINTS - 1/2" MINIMUM
44. JOINTS - 1/2" MINIMUM
45. JOINTS - 1/2" MINIMUM
46. JOINTS - 1/2" MINIMUM
47. JOINTS - 1/2" MINIMUM
48. JOINTS - 1/2" MINIMUM
49. JOINTS - 1/2" MINIMUM
50. JOINTS - 1/2" MINIMUM
51. JOINTS - 1/2" MINIMUM
52. JOINTS - 1/2" MINIMUM
53. JOINTS - 1/2" MINIMUM
54. JOINTS - 1/2" MINIMUM
55. JOINTS - 1/2" MINIMUM
56. JOINTS - 1/2" MINIMUM
57. JOINTS - 1/2" MINIMUM
58. JOINTS - 1/2" MINIMUM
59. JOINTS - 1/2" MINIMUM
60. JOINTS - 1/2" MINIMUM
61. JOINTS - 1/2" MINIMUM
62. JOINTS - 1/2" MINIMUM
63. JOINTS - 1/2" MINIMUM
64. JOINTS - 1/2" MINIMUM
65. JOINTS - 1/2" MINIMUM
66. JOINTS - 1/2" MINIMUM
67. JOINTS - 1/2" MINIMUM
68. JOINTS - 1/2" MINIMUM
69. JOINTS - 1/2" MINIMUM
70. JOINTS - 1/2" MINIMUM
71. JOINTS - 1/2" MINIMUM
72. JOINTS - 1/2" MINIMUM
73. JOINTS - 1/2" MINIMUM
74. JOINTS - 1/2" MINIMUM
75. JOINTS - 1/2" MINIMUM
76. JOINTS - 1/2" MINIMUM
77. JOINTS - 1/2" MINIMUM
78. JOINTS - 1/2" MINIMUM
79. JOINTS - 1/2" MINIMUM
80. JOINTS - 1/2" MINIMUM
81. JOINTS - 1/2" MINIMUM
82. JOINTS - 1/2" MINIMUM
83. JOINTS - 1/2" MINIMUM
84. JOINTS - 1/2" MINIMUM
85. JOINTS - 1/2" MINIMUM
86. JOINTS - 1/2" MINIMUM
87. JOINTS - 1/2" MINIMUM
88. JOINTS - 1/2" MINIMUM
89. JOINTS - 1/2" MINIMUM
90. JOINTS - 1/2" MINIMUM
91. JOINTS - 1/2" MINIMUM
92. JOINTS - 1/2" MINIMUM
93. JOINTS - 1/2" MINIMUM
94. JOINTS - 1/2" MINIMUM
95. JOINTS - 1/2" MINIMUM
96. JOINTS - 1/2" MINIMUM
97. JOINTS - 1/2" MINIMUM
98. JOINTS - 1/2" MINIMUM
99. JOINTS - 1/2" MINIMUM
100. JOINTS - 1/2" MINIMUM

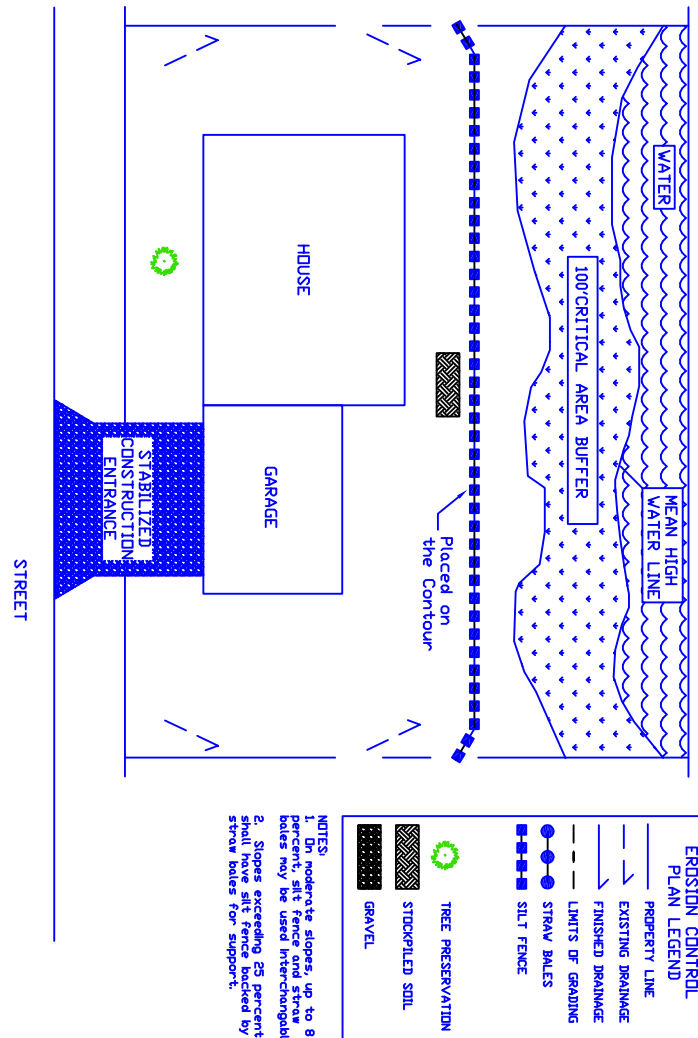

## NOTES

1. No driveway or paved area may be constructed over landfill.
2. Dirt/surf material must away from immediate disposal area.
3. All landfilled wastes (liquids, sludge, etc.) shall be discharged into the sewage disposal system. Flooded areas, leaking tanks, and other saturated areas shall be isolated from the sewage disposal system.
4. No sewage disposal system shall be located within 100 feet of the top of the bank of any water course or within 25 feet of any drainage ditch.
5. Sewage disposal system shall be constructed in the exact location shown on the site plan.
6. No garbage grinder will be installed.
7. Tank and pump chamber sized and installed per design.
8. Place the parallel or crisscrossed steel mesh present across sections per plan. If logs of debris are present, they shall be cut into 12" sections. If debris is present, the sections shall be cut into 12" sections per plan. If debris is present, the sections shall be cut into 12" sections per plan.
9. All distribution pipes shall be cut to 1/2" or 3/4" of a pipe if necessary. 18" x 24" metal (galvanized) manholes shall be installed in the manholes. These manholes shall be spaced six feet on center.
10. All manholes shall be installed in the manholes. These manholes shall be spaced six feet on center.
11. Shallow Trench Systems: Useable fill shall have a penetration rate similar to, but not faster than, native soil. The fill shall be placed and compacted in 6" lifts. The fill shall be placed and compacted in 6" lifts. The fill shall be placed and compacted in 6" lifts.
12. System is not to be installed in wet soils or during rainstorms.
13. Water shall be supplied from an individual well located at a depth on the site plan and is to be installed in accordance with a "Rank 5" of the New York State Department of Health Rural Water Supply. Publication 1995 edition.
14. Heavy equipment shall be kept off the effluent disposal area following installation of the sewage disposal system.
15. Prior to installing a construction inspection, the construction officer shall be contacted to determine that construction at the time of inspection was completed in general conformance with the approved plans (if applicable).
16. Upon completion of the P.E. shall certify in writing that the proposed sewage disposal system was installed in accordance with the approved plans.
17. Speed reducer to be installed in D-box to set in even distribution.
18. Inspection and maintenance of system shall be in accordance with NYS Appendix 75-A.
19. Manholes:
  - a. Manholes to be installed at 80' and 160' intervals.
  - b. Manholes to be installed at 80' and 160' intervals.
  - c. Manholes to be installed at 80' and 160' intervals.
  - d. Manholes to be installed at 80' and 160' intervals.
  - e. Manholes to be installed at 80' and 160' intervals.
  - f. Manholes to be installed at 80' and 160' intervals.
  - g. Manholes to be installed at 80' and 160' intervals.
  - h. Manholes to be installed at 80' and 160' intervals.
  - i. Manholes to be installed at 80' and 160' intervals.
  - j. Manholes to be installed at 80' and 160' intervals.
  - k. Manholes to be installed at 80' and 160' intervals.
  - l. Manholes to be installed at 80' and 160' intervals.
  - m. Manholes to be installed at 80' and 160' intervals.
  - n. Manholes to be installed at 80' and 160' intervals.
  - o. Manholes to be installed at 80' and 160' intervals.
  - p. Manholes to be installed at 80' and 160' intervals.
  - q. Manholes to be installed at 80' and 160' intervals.
  - r. Manholes to be installed at 80' and 160' intervals.
  - s. Manholes to be installed at 80' and 160' intervals.
  - t. Manholes to be installed at 80' and 160' intervals.
  - u. Manholes to be installed at 80' and 160' intervals.
  - v. Manholes to be installed at 80' and 160' intervals.
  - w. Manholes to be installed at 80' and 160' intervals.
  - x. Manholes to be installed at 80' and 160' intervals.
  - y. Manholes to be installed at 80' and 160' intervals.
  - z. Manholes to be installed at 80' and 160' intervals.